

## Track Light T10 Series

The iLumen T10 Series Track lights feature a modern and sleek design that delivers uniform and precise illumination with an adjustable beam angle suitable for a variety of spaces. The range is available in three physical sizes to suit a variety of applications. High colour rendering (CRI) ensures excellent light quality, while a comprehensive selection of accessories are available to help you achieve the desired effect. These fixtures are available with a number of smart driver options to suit your exact control requirements for commercial or residential applications.

CRI90 & 97  
options

Adjustable  
beam angle

Uniform  
Illumination

DALI2, DALI+,  
Casambi options

Fixed CCT or  
Tunable  
White

White, Black or  
custom colours

50,000hr  
Lifetime

Range of  
accessories  
available



# iLumen Track Light T10 Series



## General Specs


Power (W)	12W(55mm), 20W(75mm)& 30W(90mm)
Lumen Output	550lm(55mm), 2000lm(75mm)& 2500lm(90mm) @4000k
CCT (K)	2700, 3000k, 4000k & TW 2700-6500K
Beam Angle	Adjustable 15-55 degree
CRI/RA	>90 (97 on request)
SDCM	<2
Led Life	L90B10 >50,000 hrs Ts = 105 °C (LM-80/TM-21)
Protection	IP20
Track Type	Powergear as standard, others adaptors available on request
Driver Option	Drivers will either be integrated into the fitting or will be part of the track adapter depending on exact model chosen. Options include On/Off, DALI2, DALI+, Casambi, phase dimmed or manual dimming on-board




## Dimensions

### Driver Built in


(available for DALI fixed CCT, Triac and on-board dimming only)

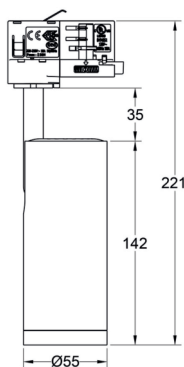

55mm 12W

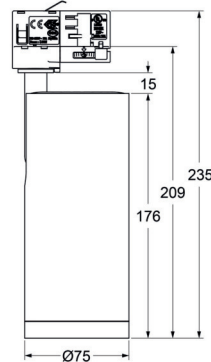


75mm 20W

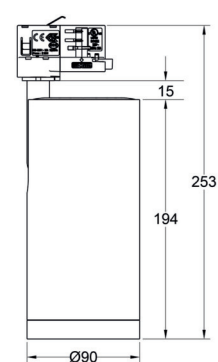


90mm 30W

### Driver Built into Track Adaptor


(DALI model shown, sizes vary slightly depending on model)

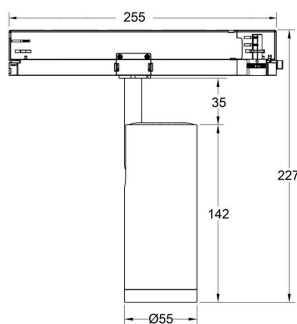

55mm 12W

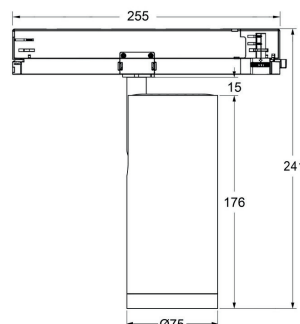

75mm 20W

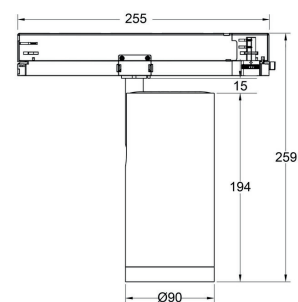

90mm 30W

Dimensions above are a guide only, exact style provided will depend on the exact model chosen, contact us for more details



*intelligent light*

[www.ilumen.com.au](http://www.ilumen.com.au)

Details subject to change V1.1

Part number configurator

**IL-TLST10-XXXX-XX-90-1555-x-xx**

iLumen

**Track Light Spot T10 Series**

**Size**  
5512 (55mm 12W)  
7520 (75mm 20W)  
9030 (90mm 30W)

**CCT**  
27k (2700k)  
3k (3000k)  
4k (4000k)  
TW (2700-6500k)

**CRI**  
>90  
CRI97 on request

**Beam Angle**  
1555  
(15 - 55 degree)

**Colour**  
W (white)  
B (black)

**Driver**  
OF (on/off)  
D2 (DALI2)  
CA (Casambi)  
PH (phase dim)  
MD (manual dimmer)

**Example: IL-TLST10-7520-TW-90-1555-W-D2**

iLumen Track Light Spot, T10 Series, 75mm diameter, 20W, Tunable White, CRI90, White, DALI2 Driver

Custom configurations are available on request

## Accessories

### Barn Doors



55mm: IL-TLST10ACC-55BD-x  
75mm: IL-TLST10ACC-75BD-x  
90mm: IL-TLST10ACC-90BD-x  
\*replace x with B or W for Black or White

### Snoot




55mm: IL-TLST10ACC-55SN-x  
75mm: IL-TLST10ACC-75SN-x  
90mm: IL-TLST10ACC-90SN-x  
\*replace x with B or W for Black or White

### Honeycomb louvre



55mm Black: IL-TLST10ACC-55HC-B  
75mm Black: IL-TLST10ACC-75HC-B  
90mm Black: IL-TLST10ACC-90HC-B

### Softening Lens



55mm: IL-TLST10ACC-55SL  
75mm: IL-TLST10ACC-75SL  
90mm: IL-TLST10ACC-90SL

### Oval Lens



55mm: IL-TLST10ACC-55OL  
75mm: IL-TLST10ACC-75OL  
90mm: IL-TLST10ACC-90OL

### Wide Flood Lens



55mm: IL-TLST10ACC-55WL  
75mm: IL-TLST10ACC-75WL  
90mm: IL-TLST10ACC-90WL

### Track



We have a full range of track and accessories to suit every project, please contact our distributors to discuss options



*intelligent light*

[www.ilumen.com.au](http://www.ilumen.com.au)

**Distributed By**

**smartscape**  
connected lighting systems

PH: 07 33571922

Email: [info@ssqld.com.au](mailto:info@ssqld.com.au)

Web: [www.ssqld.com.au](http://www.ssqld.com.au)